




Bakker Magnetics FDA Plate Magnets

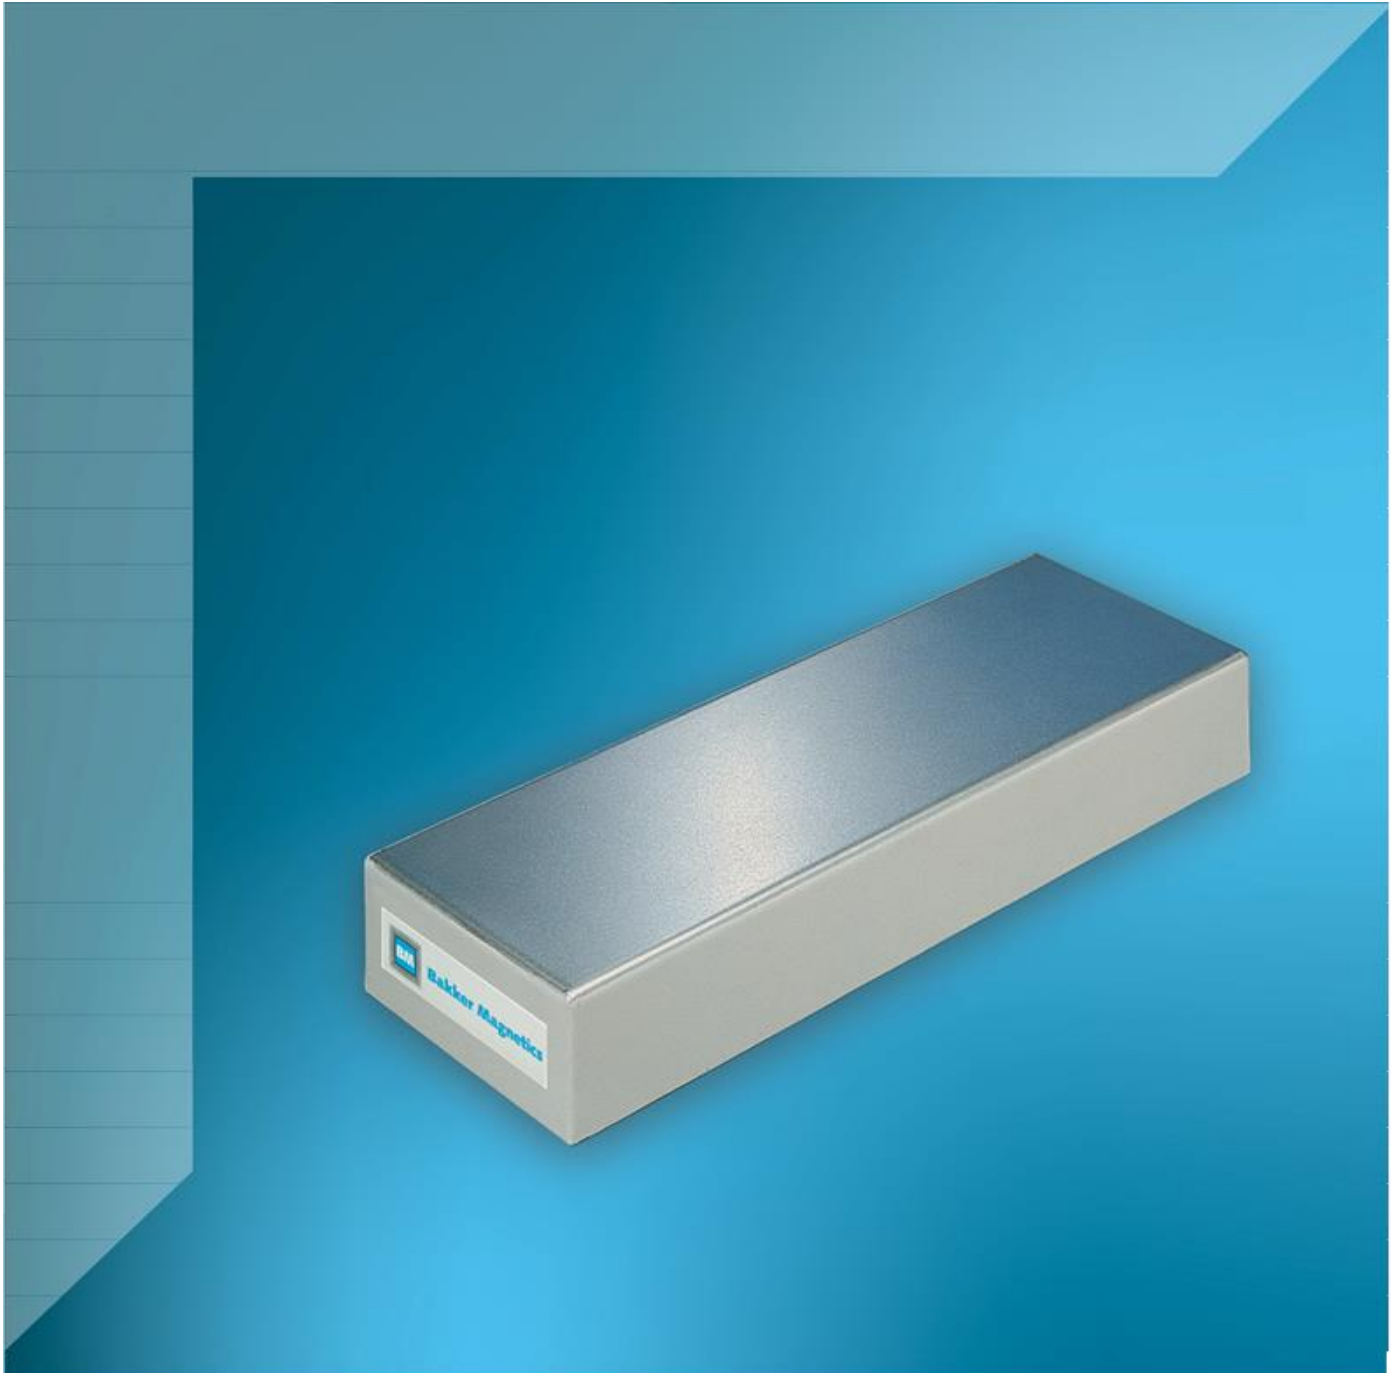

- Execution : Plate magnet type FDA
Sturdy construction
Permanent magnetic
- Housing : Stainless steel 1.4301
- Rear plate : Steel S235 with thread holes
- Surface treatment : Anti-corrosion primer
Painted blue RAL5015
- Magnetic part : Permanent ceramic magnets quality BM7 or
Permanent Neodymium magnets quality BM35

Under normal circumstances Bakker Magnetics provides a life-time guarantee on the applied ceramic magnets.

Ceramic (FDA)

Article Number	A (length)	B (width)	C (depth)	D (distance between threaded holes)	Thread holes	Weight (kg)
70.050	75	75	30	50	2xM8x8	1
70.051	275	75	30	250	2xM8x8	3.5
70.052	340	75	30	250	2xM8x8	3.7
70.053	105	105	30	50	2xM8x8	1.9
70.054	210	105	30	100	2xM8x8	3.9
70.055	310	105	30	200	2xM8x8	5.7
70.056	340	105	30	250	2xM8x8	6.3
70.057	145	105	50	100	2xM8x8	3.8
70.058	210	105	50	100	2xM8x8	5.6
70.059	280	105	50	200	2xM8x8	7.4
70.060	310	105	50	200	2xM8x8	8.2
70.061	345	105	50	250	2xM8x8	9.2
70.062	410	105	50	150	3xM8x8	10.9
70.063	445	105	50	150	3xM8x8	11.8
70.064	510	105	50	200	3xM8x8	13.6
70.065	610	105	50	150	4xM8x8	16.2
70.066	765	105	50	200	4xM8x8	20.3
70.067	280	180	90	200	2xM12x10	23.5
70.068	400	180	90	150	3xM12x10	33.5
70.069	345	280	95	100	2xM12x15	43.5
70.070	545	280	95	150	4xM12x15	69
70.071	610	280	95	150	4xM12x15	77.5
70.072	815	280	95	200	4xM12x15	103

Ceramic (FDA)

Article Number	A (length)	B (width)	C (depth)	D (distance between threaded holes)	Thread holes	Weight (kg)
24.001	100	205	86.5	50	2xM10x25	8.5
24.002	125	205	86.5	75	2xM10x25	10
24.003	150	205	86.5	100	2xM10x25	12.5
24.004	200	205	86.5	100	2xM10x25	16.5
24.005	250	205	86.5	150	2xM10x25	21
24.006	300	205	86.5	200	2xM10x25	25
24.007	350	205	86.5	250	2xM10x25	29
24.008	400	205	86.5	300	2xM10x25	33
24.009	450	205	86.5	350	2xM10x25	37.5
24.010	500	205	86.5	400	2xM10x25	41.5
24.011	550	205	86.5	225	3xM10x25	45.5
24.012	600	205	86.5	250	3xM10x25	50
24.013	650	205	86.5	270	3xM10x25	54
24.014	700	205	86.5	300	3xM10x25	58
24.015	750	205	86.5	325	3xM10x25	62
24.016	800	205	86.5	350	3xM10x25	66.5
24.017	850	205	86.5	375	3xM10x25	71
24.018	900	205	86.5	400	3xM10x25	75
24.019	950	205	86.5	425	3xM10x25	79
24.020	1000	205	86.5	300	4xM10x25	83

Neodymium (FDA)

Article Number	A (length)	B (width)	C (depth)	D (distance between threaded holes)	Thread holes	Weight (kg)
24.050	50	104	41.5	30	2xM6x20	1.6
24.051	92	104	41.5	50	2xM8x20	2.9
24.052	134	104	41.5	75	2xM8x20	4.3
24.053	176	104	41.5	100	2xM8x20	5.6
24.054	218	104	41.5	100	2xM8x20	7
24.055	260	104	41.5	150	2xM8x20	8.3
24.056	302	104	41.5	200	2xM10x20	9.7
24.057	344	104	41.5	250	2xM10x20	11
24.058	386	104	41.5	250	2xM10x20	12.4
24.059	428	104	41.5	300	2xM10x20	13.7
24.060	470	104	41.5	350	2xM10x20	15
24.061	512	104	41.5	400	2xM10x20	16.4

For more information on this product range, contact us on Tel: **01525 372714** Email: Sales@LHS.uk.com Web: <http://www.LHS.uk.com>