

Plate Demagnetizer Type DP

Manual Drive:

Rugged construction, Waterproof construction, Innovative, Effective

Applications:

Demagnetization

Construction:

Coil incorporated in an aluminium box (blue). Reinforced system for thickness pieces up to 50 mm. Tapped mounting holes. ON/OFF switch with pilot lamp. 1.5 meters cable. It is necessary that the workpiece be moved through the alternative field at a slow and constant speed (recommended 0,2 m/sec.). At the end of the operation, the part must be moved away as far as possible from the unit (20 cm), in order to avoid incomplete demagnetization.

H= active width of demagnetisation Voltage 230/400 VAC

Duty Cycle: 100%




Art.-N°16.02		Diagram below: dimensions in mm							
Product	Weight	A	B	C	D	E	F	G	H
16.02.160	22	148	278	310	121	850VA	IP 54	230VAC	160
16.02.250	30	148	368	400	121	1380VA	IP 54	230VAC	250
16.02.400	46	148	518	550	121	2050VA	IP 54	230VAC	400
16.02.400.400	54	166	518	550	148	2860VA	IP 65	400VAC	400
16.02.500.400	67	166	618	650	148	3600VA	IP 65	400VAC	500
16.02.600.400	80	166	718	750	148	4420VA	IP 65	400VAC	600
16.02.650.400	84	166	768	800	148	4700VA	IP 65	400VAC	650
16.02.700.400	92	166	818	850	148	5000VA	IP 65	400VAC	700
16.02.800.400	105	166	918	950	148	5600VA	IP 65	400VAC	800
16.02.900.400	117	166	1018	1053	148	6480VA	IP 65	400VAC	900
16.02.1000.400	129	166	1118	1150	148	7000VA	IP 65	400VAC	1000

OPTIONS :

Other voltage

Degrease frequency machine to demagnetize hard pieces

Automatic and semi-automatic systems (for bearings,...)

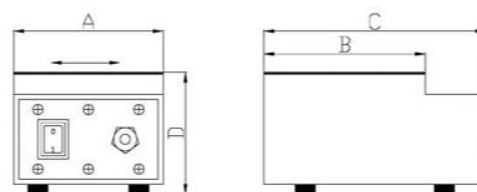

E= Puissance - Power - Leistung

For more information, please contact us on 01525 372714 or by Email: Sales@LHS.uk.com or visit our website
Web: <http://www.LHS.uk.com>