

## NEOMICRO<sup>2</sup> Permanent Fine Pole Grinding Chuck

### Intended Use:

This chuck is ideal for precision grinding of small, medium or large workpieces.

### Features:

- The fixed pole plate with transverse poling, pole pitch 1.4 mm steel and 0.5 mm brass
- Viability (limit regrinding): 7 mm
- Dual Neodymium magnetic system, the nominal clamping force of 100 N/cm<sup>2</sup>
- Solid steel base with robust switching mechanism
- Waterproof construction
- Supplied with Rear and side stops, set of clamps, and allen key
- UK repair and spares available


### Applications:

- Precision grinding of small and thin, as well as large components
- Recommended minimum workpiece dimensions 4x4x1 mm
- EDM



Code	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
11.810.17	175	100	49	7
11.810.25	250	100	49	10
11.813.25	255	130	49	13
11.815.25	250	150	51	15
11.815.30	300	150	51	18
11.815.35	350	150	51	22
11.815.40	400	150	51	28
11.815.45	450	150	51	28
11.820.40	400	200	51	35
11.820.45	450	200	51	37
11.820.50	500	200	51	49
11.820.60	600	200	51	41
11.825.50	500	250	56	56
11.830.60	600	300	56	81

Other sizes available on request

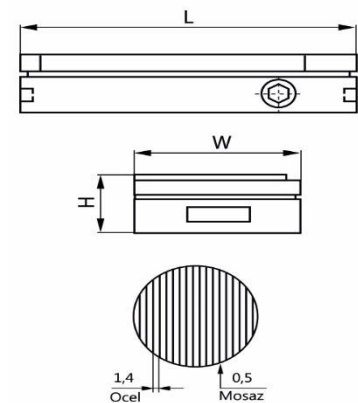

For further information on this product range please contact us on Tel: 01525 372714 Email: [Sales@LHS.uk.com](mailto:Sales@LHS.uk.com) Website: <http://www.LHS.uk.com>